

Locksafe Industrial Safety Equipment



GEARED FOR SAFETY

LOCKING SYSTEMS



**Protecting Your Most Important Assets
Human Resources and Lost Time Injuries**

Version 11.00

PO Box 629, Willetton, WA 6155 Phone (08) 9455 7255 (08) 9455 1669 Fax (08) 9455 7244

www.locksafe.com.au info@locksafe.com.au

A Safety Isolators Australia Pty Ltd Company. A.C.N. # 079 020 554


Locksafe Industrial Safety Equipment

**Protecting Your Best Assets -
Human Resources and Lost Time Injuries**

High Security Padlocks (ABLOY)

- ◆ Durable and reliable operation
- ◆ Extensive master keying possibilities
- ◆ Maximum key security
- ◆ Vast number of key combinations
- ◆ Optimum resistance against physical attack
- ◆ Patented key security levels
- ◆ Superior physical strength
- ◆ Virtually pickproof

ABLOY® EXEC

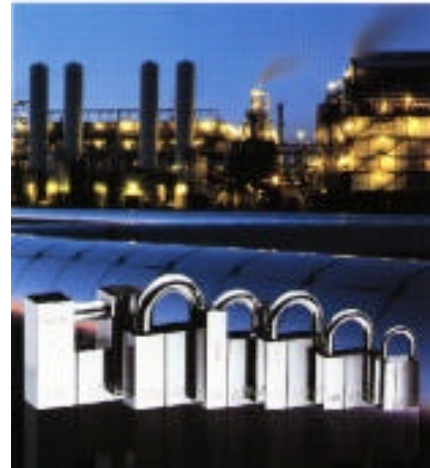

- ◆ Lifetime warranty against key breakage. This feature will decrease the amount of keys you may purchase due to key breakage or early wear and tear
- ◆ Key can be inserted either way up into the lock.
- ◆ The cylinder mechanism has no spring loaded parts which can cause malfunction through wear, dirt, moisture, corrosion and freezing
- ◆ Key has 360 million combinations, which gives you a huge scope for master keying capabilities.
- ◆ Locking system is full restricted; keys can not be duplicated. Signed authorization is required on the issue of subsequent keys.
- ◆ Tamperproof. The lock is extremely resistant to drilling, reeving and manipulation
- ◆ Keying is done in Australia minimizing delivery time.

***Your Choice for your Machinery Lockout -
in chemically charged atmospheres, corrosive and dusty environments.***




PO Box 629, Willetton, WA 6155 Phone (08) 9455 7255 (08) 9455 1669 Fax (08) 9455 7244
www.locksafe.com.au info@locksafe.com.au
A Safety Isolators Australia Pty Ltd Company. A.C.N. # 079 020 554

Locksafe Industrial Safety Equipment


**Protecting Your Best Assets-
Human Resources and Lost Time Injuries**

High Security Padlocks (ABLOY)

- ◆ ABLOY EXEC discs are controlled by the advanced disc steering system which contributes to its easy, smooth operation without the resistance usually associated with conventional pin tumbler cylinders. The absence of pins and springs ensures a durable and reliable operation as the disc principle is resistant to the type of failure often caused by dirt and corrosion.

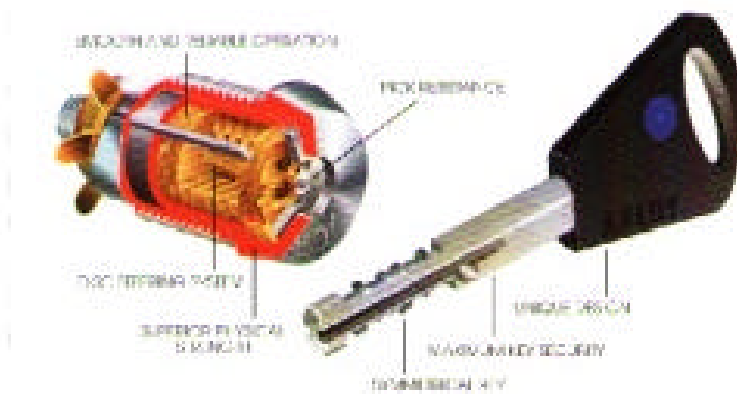

Extensive Master keying possibilities

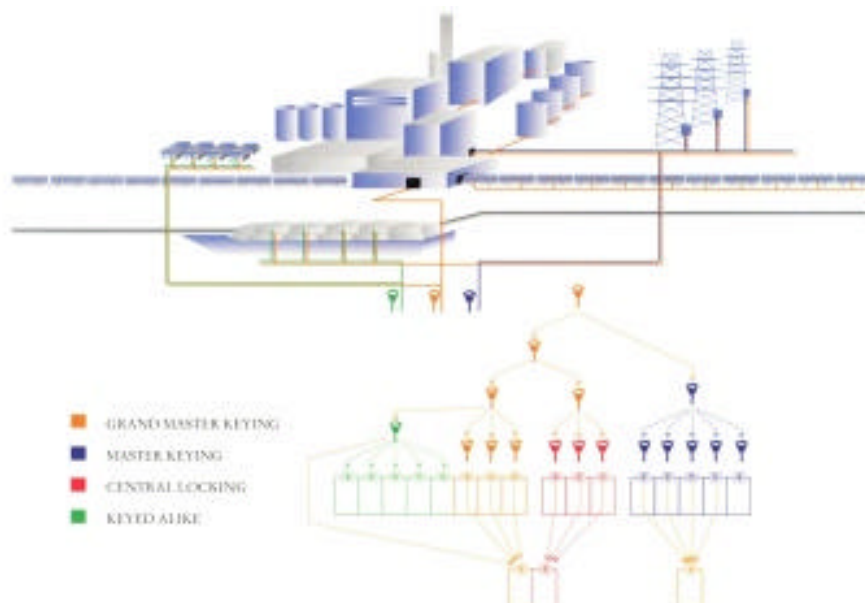

PO Box 629, Willetton, WA 6155 Phone (08) 9455 7255 (08) 9455 1669 Fax (08) 9455 7244
www.locksafe.com.au info@locksafe.com.au
A Safety Isolators Australia Pty Ltd Company. A.C.N. # 079 020 554

Locksafe Industrial Safety Equipment

Protecting Your Best Assets -
Human Resources and Lost Time Injuries


AVA Lockout Padlocks (ABLOY)

- ◆ As the AVA lock mechanism is based on a rotating disc system this offers longer life to the lock and has virtually no wear and tear on the lock nor the key.
- ◆ The AVA lock is resistant to manipulation and drilling whereas pin spring locks are not.
- ◆ The AVA lock is particularly good in harsh conditions such as chemically charged, corrosive or dusty environments.
- ◆ The keys are unique in design having angular cuts and no depth cuts, they can almost not be duplicated making them the most secure.
- ◆ Locking mechanism can easily be cleaned out with high pressure air.




The AVA key system

Keyed Alike: The same key operates several locks. This system would be suitable for use with different padlock requirements operated by one key.



Master Keyed: All locks are operated by their individual keys and also by the master key, which can be used to open all the locks in the system

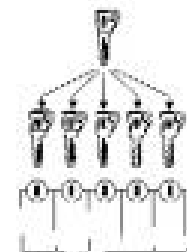

Part No. Safety Lockout Padlock Red **LS20001**
Safety Lockout Padlock Yellow **LS20002**

PO Box 629, Willetton, WA 6155 Phone (08) 9455 7255 (08) 9455 1669 Fax (08) 9455 7244
www.locksafe.com.au info@locksafe.com.au
A Safety Isolators Australia Pty Ltd Company. A.C.N. # 079 020 554

Locksafe Industrial Safety Equipment

Protecting Your Best Assets - Human Resources and Lost Time Injuries

LS-MPH-3 ; Scissor Action Hasps—Mild Steel or Stainless Steel

These multi padlock hasps are made from marine grade 316 stainless steel or mild steel, providing a innovative locking facility for any of the Locksafe isolator products.

The LS-MPH 3 is innovative in design, providing an easy, increased dimension, foolproof access to the hasp entry and a Tamper proof locking facility.



The LS-MPH 3 provides a economical dual purpose function :

1. A Dual level safety Lock out facility addressing the workplace safety grey area of Shift Change where safety procedure demands removal of personal padlocks. In this situation, the machine maintenance may not be completed thus requiring the machine to remain isolated. The seventh centrally positioned locking hole allows for special different reach padlocks, normally administered and controlled by workshop supervision, to be applied. The incoming shift would arrange for removal of same and apply their own personal padlock i.e. administration padlocks utilised would be a key like product allowing removal by different supervisors.
2. Provides a specialist l/out facility for electrical switchgear, switch rooms, cabinets and distribution boards etc.

NB: The 5.7 mm hasp shank will fit any manufacture switch gear, the round cross section providing a single dimension locking facility unlike the dual dimension attainable on scissor action hasps i.e. the dimensions of the jaws of scissor action hasps depends on the whether the jaw is face on or edge on in the switch gear locking position.



LS-MPH Scissor Action Hasp has been superseded by our supply of the commonly used Master type hasps. Available in mild steel as well as in Marine Grade 316 Stainless Steel.

Applications: A failsafe method of providing positive locking isolation on any energy source for personnel maintaining machinery in a controlled workplace safety environment as required by statutory regulations.

PART Numbers and Options

- # LS Scissor Action Mild Steel, **LS10001**
- # LS Scissor Action Stainless Steel, **LS10010**
- # LS-MPH 3, available in Stainless Steel only. **LS10009**

PO Box 629, Willetton, WA 6155 Phone (08) 9455 7255 (08) 9455 1669 Fax (08) 9455 7244
www.locksafe.com.au info@locksafe.com.au
A Safety Isolators Australia Pty Ltd Company. A.C.N. # 079 020 554

Locksafe Industrial Safety Equipment

**Protecting Your Best Assets -
Human Resources and Lost Time Injuries**

Model LS-SBV Lockable Vented Ball Valve

The LS-SBV safety ball valves are specifically designed to vent the load side of the line to atmosphere when locked out. This is to ensure that no build-up of air in the load line can occur due to any leakage across the valve, i.e. the load side will always be maintained at zero pressure whilst the valve is locked out.

The locking mechanism is designed in order that the valve can only be locked only in the OFF condition. Furthermore, locking can be facilitated with conventional padlocks or multiple padlock hasp.

These high quality ball valves are double Teflon sealed and carry full international safety specifications. Suitable for air, gas and steam.



A non lockable version of this vented valve is also available. # **LS-BV Vented**

Note: All ball valves listed are premium grade valves with safety specifications

Model LS-SBV-TP (Threaded Port)

This is a T shaped threaded port valve available in a lockable or non lockable form and the valve has a threaded port on the bottom where air, oil, gas is able to be routed back to the reservoir. The non lockable form can be used in conjunction with an sintered brass breather which will vent workshop air line supplies to atmosphere when closed off allowing single hand removal of air tools from the supply.

Applications: Air brakes, air starters, pneumatic systems.

Part Numbers and Options

LS-SBV-VENT (Bore size) Lockable double female straight through BSP

LS16... 1/8" through to 2" available

Note: Non Lockable part number is LS-BV-Vent

*LS-SBV-TP (bore size) Lockable (or non lockable) double female straight through BSP

LS17... 1/8" through 1" available

Note: Non Lockable part number is LS-BV-TP

Note: All of the above are available in lockable non-vented options, three-way or straight through options.

Part No. LS-SBV—N/VENT - price on application

The 2" unit is not a standard stock item but can be ordered to requirement

Technical Specifications

Valve Body	Made in the EEC
Material Body	Nickel plated brass
Ball	Stainless steel
Safety locking plates:	Zinc plated steel

PO Box 629, Willetton, WA 6155 Phone (08) 9455 7255 (08) 9455 1669 Fax (08) 9455 7244

www.locksafe.com.au info@locksafe.com.au

A Safety Isolators Australia Pty Ltd Company. A.C.N. # 079 020 554

Locksafe Industrial Safety Equipment

**Protecting Your Best Assets-
Human Resources and Lost Time Injuries**







Model LS-GV-Isolator

These isolators are of 316 stainless steel and designed to isolate gate-valves, T-valves or stopcocks. The isolator comprises of two hinged halves that are closed around the handle of the valve and then locked shut. Due to the loose nature of the isolator no grip is provided to open or close the actuating handle. They are extremely robust and not affected by UV-rays and can be easily adapted to customers measurements.



Applications: Water, steam or air gate-valves

Part Number and Options

LS-GV 150	150mm overall diameter	 LS15001
LS-GV 200	200mm overall diameter	 LS15004
LS-GV 250	250mm overall diameter	 LS15007
LS-GV 300	300mm overall diameter	 LS15010
LS-GV 350	350mm overall diameter	 LS15013
LS-GV 400	400mm overall diameter	 LS15016

Technical Specifications


Isolator	Designed and manufactured in Western Australia
Material	1.6mm 316 stainless steel

PO Box 629, Willetton, WA 6155 Phone (08) 9455 7255 (08) 9455 1669 Fax (08) 9455 7244
www.locksafe.com.au info@locksafe.com.au
A Safety Isolators Australia Pty Ltd Company. A.C.N. # 079 020 554






Locksafe Industrial Safety Equipment

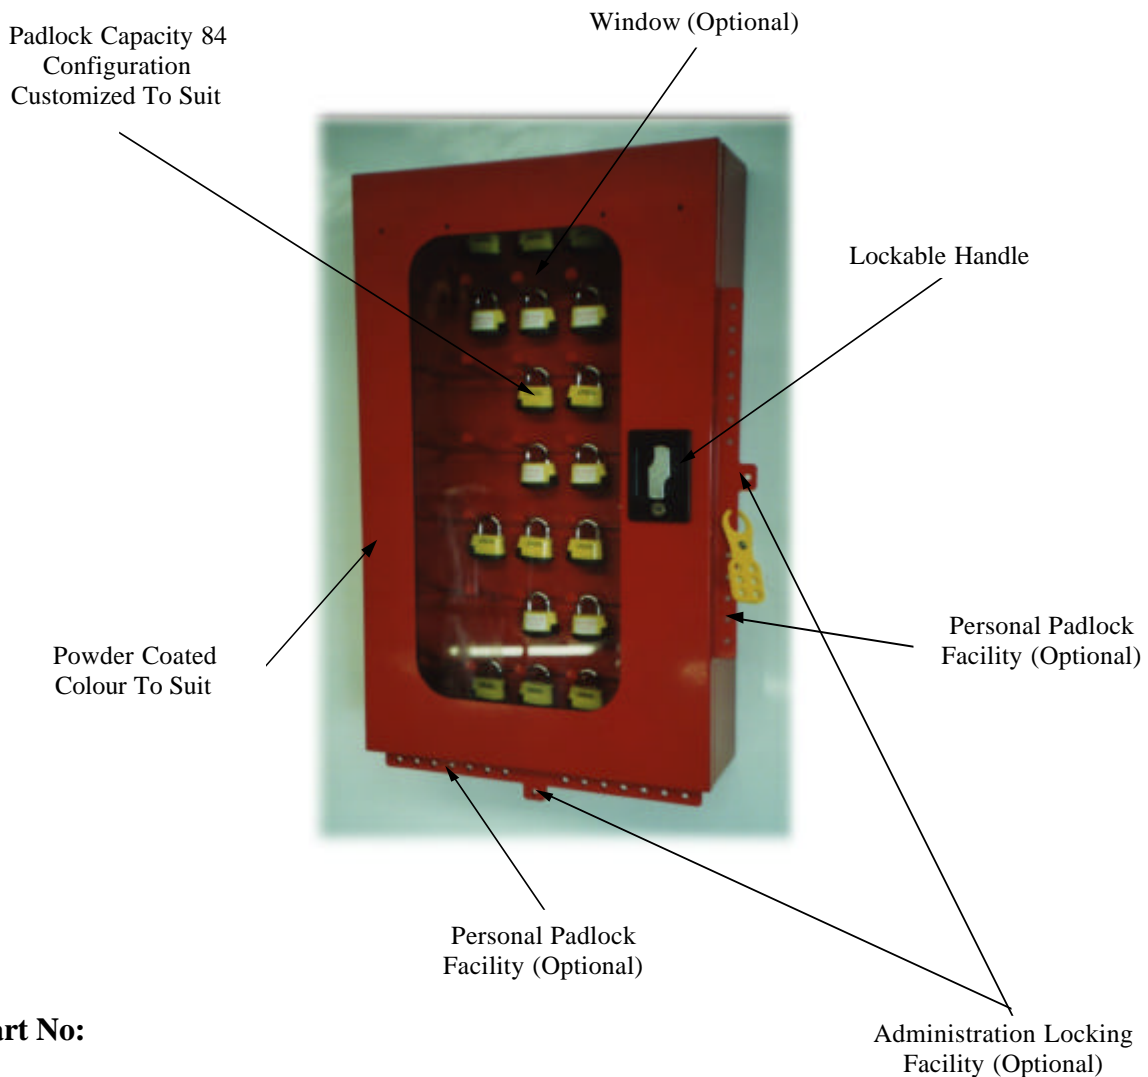**Protecting Your Best Assets -
Human Resources and Lost Time Injuries**

Safety Padlock Storage Cabinet



Part No:


430 x 450 x 150, red, window, 24 pins	 LS10002
430 x 450 x 150, yellow, no window, 24 pins	 LS10003
730 x 450 x 150, red, window, 42 pins	 LS10004
730 x 450 x 150, yellow, no window, 42 pins	 LS10005
780 x 730 x 150, yellow, no window, 50 pins	 LS10006

PO Box 629, Willetton, WA
6155 Phone (08) 9455 7255 (08) 9455 1669 Fax (08) 9455 7244
www.locksafe.com.au info@locksafe.com.au

Locksafe Industrial Safety Equipment

**Protecting Your Best Assets -
Human Resources and Lost Time Injuries**

Lock Storage Board

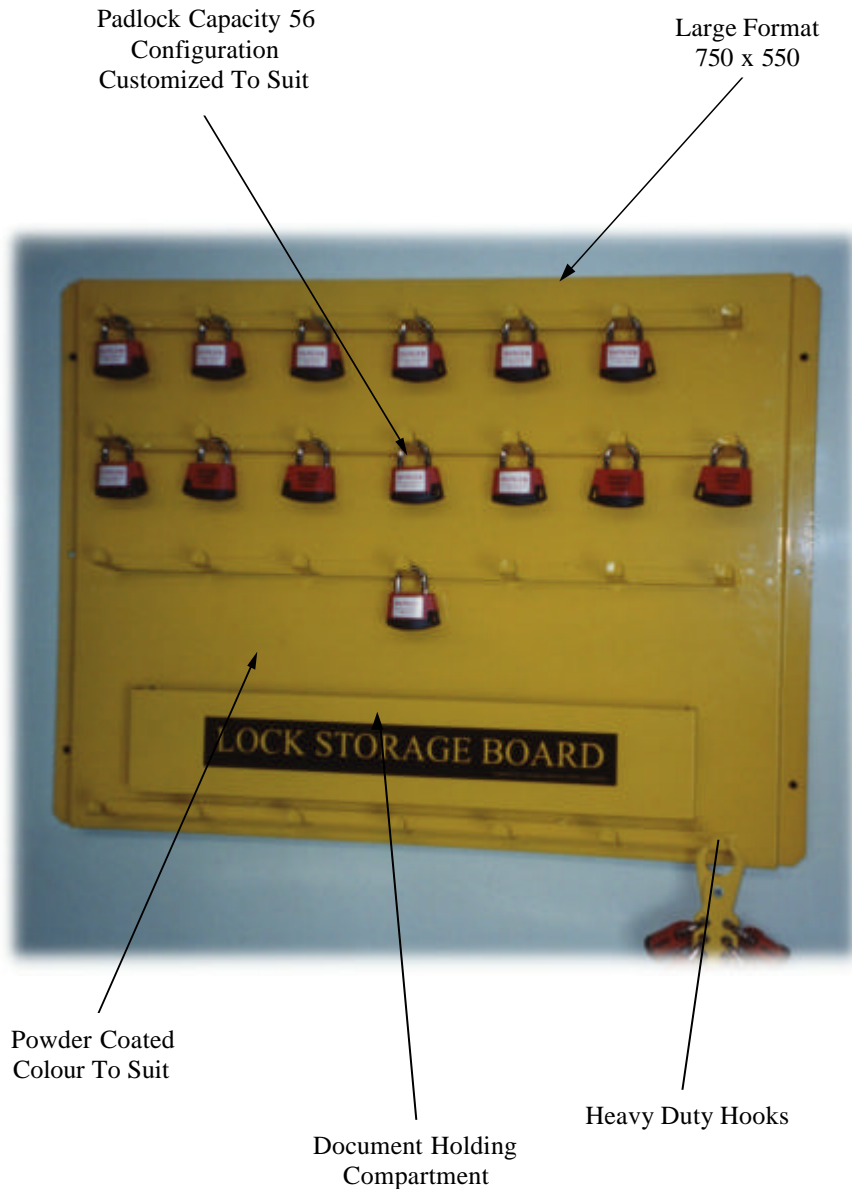

Part No:

750 x 550 x 20, yellow, window, 21 + 7 pins **LS10007**

PO Box 629, Willetton, WA 6155 Phone (08) 9455 7255 (08) 9455 1669 Fax (08) 9455 7244
www.locksafe.com.au info@locksafe.com.au
A Safety Isolators Australia Pty Ltd Company. A.C.N. # 079 020 554

Locksafe Industrial Safety Equipment

Protecting Your Best Assets -
Human Resources and Lost Time Injuries

Lockout System Solution

High Security Padlock

- Keyed alike
- Master keyed



Customized Engraving

- Up to 7 Digits
- Colour filled

Customized Labels

- "This Lock Belongs To..."
- "Danger..."



Serial Number Register

- Maintenance of your unique serial number register for re-ordering locks and keys

Date	Site location / Purpose	AVA	Serial No.	Serial No.	No. Of	Locks	Total	Total	Colour	Comments	
	to be used by	Ref. No.	Start	Finish	sets	in set	Locks	Keys			
31/05/00	Alluvial	Permit Locks	533573353 (1)	ADM1001	N/A	1	70	70	3	Red	Order No. A23269
31/05/00		Permit Locks	533577353 (2)	ADM1002	N/A	1	20	40	3	Red	Order No. A23269
10/08/00							20				Order No. A25651
31/05/00		Permit Locks	537573353 (3)	ADM1003	N/A	1	20	20	3	Red	Order No. A23269
31/05/00	Primary Crusher	Permit Locks	537577353 (4)	ADM1004	N/A	1	20	20	3	Red	Order No. A23269

Safety Padlock Storage Cabinet

- Various configuration options for your "Permit" Isolation System




Safety Padlock Carry Bag

- Heavy duty zip
- 1500 denier, non-tear



Lock Storage Board

- Stores your "Personal" Isolation Padlocks and the various tags

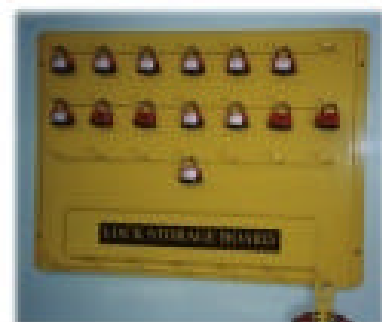

PO Box 629, Willetton, WA 6155 Phone (08) 9455 7255 (08) 9455 1669 Fax (08) 9455 7244

www.locksafe.com.au info@locksafe.com.au

A Safety Isolators Australia Pty Ltd Company. A.C.N. # 079 020 554